


2" Electric Powered Diaphragm Pumps

Handles up to 1.4" spherical solids



Available on Wheels or Skid
MCP5411-1ST (Shown), MCP5411-3
MCP6411-1, MCP6411-3

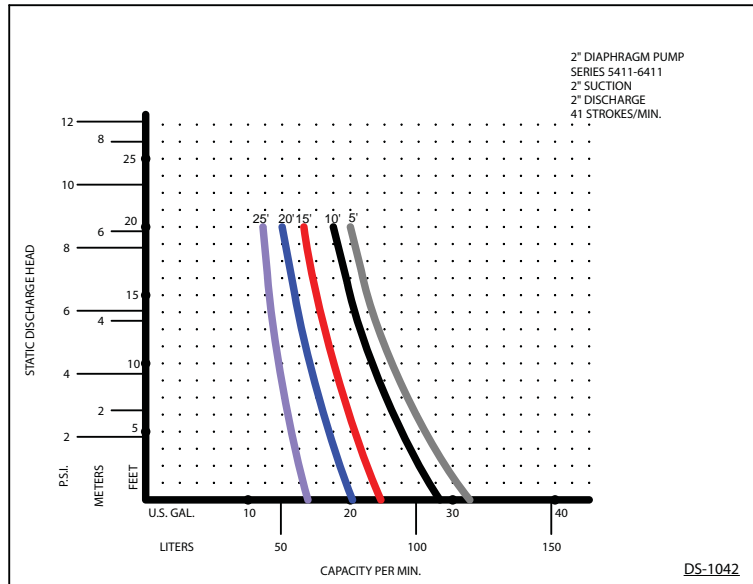

PUMP		MCP5411-1	MCP5411-3	MCP6411-1	MCP6411-3
Suction / Discharge	in.	2	2	2	2
Max. Suction Lift	ft.	25	25	25	25
Max. Discharge Head	ft.	25	25	25	25
1Hp Electric Motor		TEFC	TEFC	TEFC	TEFC
	Frame	56C	56C	56C	56C
	Phase	Single	Three	Single	Three
	Voltage	115/230	230/460	115/230	230/460
	Speed rpm	1750	1750	1750	1750
Pump Construction		Aluminum	Aluminum	Cast Iron	Cast Iron
Elastomers	(Std)	TPE w/ Neoprene Flaps	TPE w/ Neoprene Flaps	TPE w/ Neoprene Flaps	TPE w/ Neoprene Flaps
Shipping Weight	lbs.	145	145	175	175
Net Weight	lbs.	130	130	160	160
Dimensions - skid l x w x h	in.	39 x 25 x 23	39 x 25 x 23	39 x 25 x 23	39 x 25 x 23
Dimensions - wheel l x w x h	in.	41 x 25 x 23	41 x 25 x 23	41 x 25 x 23	41 x 25 x 23

Diaphragm Options:
Thermal Plastic
Elastomer (TPE) -Std
Rubber
Neoprene
Buna
Viton

Model Number Designation:
ST= Skid Mount/(TPE) Diaphragm
WT= Wheel Mount/ (TPE) Diaphragm

Specifications and design are subject to change without notice
WARNING: Do not use in explosive atmosphere or for pumping volatile flammable liquids