



KOSHIN 3/4" - 2", 1/2 HP BOTTOM SUCTION SUBMERSIBLE PUMP

Pumping Up Residual Water Down To 1mm!

PXL-65011

Applications

- Complete drainage/dewatering of flat surfaces
- Rooftops, parking structures, parking lots
- Basements, crawl spaces
- Industrial and plant maintenance
- Flooring

Features


- Pump down to floor level, within 1mm/0.04".
- Built-in check valve keeps liquid in pump and hose eliminating any "back-flow" situations.
- Liquid is channeled through the outer wall to cool motor for maximum endurance.
- Double mechanical seal, silicon-carbide, in an oil bath for superior motor protection.
- Built-in thermal protector turns off the power supply in case of overload operation.
- Impeller and casing are manufactured from a blended rubber compound, providing maximum wear resistance.
- Unique design permits either horizontal or vertical discharge, eliminating hose problems.



Specifications

Model	PXL-65011
Discharge Size	3/4 - 2"
Motor Output	1/2 HP
Delivery Volume	25 G.P.M.
Total Head	36 FT.
Voltage	110 VAC
Rated Current	6.4 AMPS.
Cable Length	20 FT.
Net Weight	26 LBS.

Performance

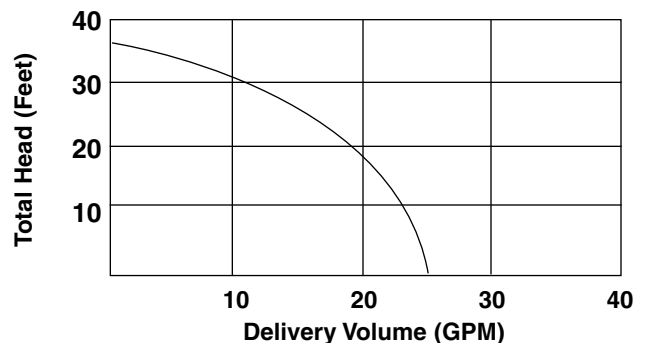

KOSHIN AMERICA CORP.

1218 Remington Road • Schaumburg, IL 60173
847/884-1570 • 800/634-4092 • FAX 847/310-0740

Distributed by: